

# INTERACTIVE TOTEM

Increase brand awareness using innovative technologies



## Totem Touch Screen 22" - 47" - 55"

A new way to communicate. Compact and stylish design, bright display and high performance. Simple, fast and intuitive presentation of the contents, video and images. An interactive solution that adapts to every need.

## Touch Table 22"

New design, high performance. Interactive solution for the trade show, events, showroom and museum. Simply powerful, incredibly intuitive. Play the video and flow the images. New capacitive touch screen. Integrated NFC reader. Optional smartphone charger.




# PRODUCTS SPECIFICATIONS

Specification	Touch Table 22"	Touch Totem			
		22"	32"	47"	55"
Power (Win/Android)	140/120 W	140/120 W	180/170 W	210/190 W	240/220 W
Size mm	650 x 650 x 750 W x D x H	370 x 370 x 1580 W x D x H	529 x 440 x 1800 W x D x H	714 x 450 x 1850 W x D x H	820 x 450 x 1850 W x D x H
Weight	59 kg	32 kg	43.5 kg	71 kg	79 kg

Model		PC Version	Android Version
System	CPU/Memory	Standard: CPU G620 RAM 2GB, Hard disk 500 GB	Rockchip 3368 Octa Core 64 bit Cortex-A53 fino a 1.5GHZ
		Superior: CPU i 3 2120 RAM 4GB, Hard disk 500 GB	
		NUC Intel Available	
	OS	Windows 7 embedded	Android 5.1 (can be upgraded)
	Connection to network	RJ45, 3G, WIFI (optional)	RJ45, WIFI, 3G (optional)
Touch Screen System	Touch Screen	Touch foil, capacitive (touch Table), IR mode (Totem)	Touch foil, capacitive (touch Table), IR mode (Totem)
	Touch Ways	Finger, Touch Pen	Finger, Touch Pen
	Touch dots	1/2/4/6 points (optional)	2 points
	Durability	More than 50 million touch	More than 50 million touch
Power	Voltage	ACI100-240V 50/60HZ	ACI100-240V 50/60HZ

Model		
Screen	Panel Brand	Samsung and LG Full New 100% A+ Grade Brand Panel
	Panel Size	22" - 32" - 47" - 55"
	Display Ratio	16:9
	Resolution	1080x1920
	Viewing Angle	178°/178° (H/V)
	Color	16.7M
	Backlights	LED
	Brightness	up to 450 cd/m2
	Contrast	5000:1
Body	Shell	Galvanized steel sheet. Thickness: 1.0-1.5mm
	Color	Black, White, Silver or customized colors
	Packing	By carton with foam inside and wood
Instructions	Interface	VGA/HDMI/USB
	Working temperature	-5°C - 75°C
	Material	Aluminium alloy, tempered glass
	Surface	Spraying, frosted aluminium
Optional Functions	Fan, temperature and light sensor	
	3G Capability	
	Human sensor	
	Anti-dazzle	

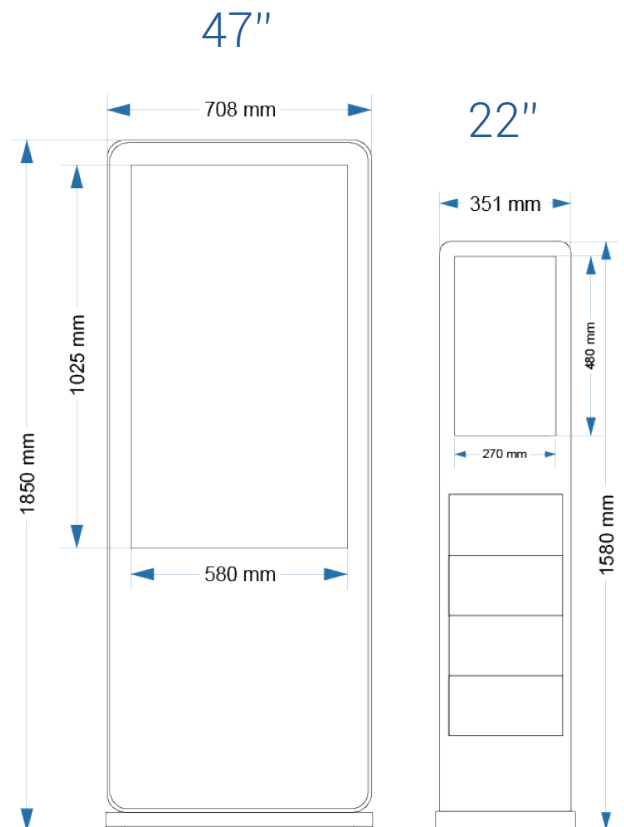

the characteristics can change without notice

**Intertouch s.r.l.**

Via Brennero 47a - 00141 Rome (Italy) - [www.intertouch.it](http://www.intertouch.it) - [info@intertouch.it](mailto:info@intertouch.it) - ph +39 06 64220488