

LED VIDEO SHELF

Live Smart Display




First LED all digital shelf technology capable of delivering dynamic pricing, promotion, product and brand related information at the shelf.

- Brand Awareness and Attraction.
- Product Information.
- Dynamic Pricing.
- High value data capture and research tool.
- New Incremental Medium.

Intertouch s.r.l.

Via di Pietralata 157 - 00158 Rome (Italy) - www.intertouch.it - info@intertouch.it - ph +39 06 64220488

PRODUCT SPECIFICATION

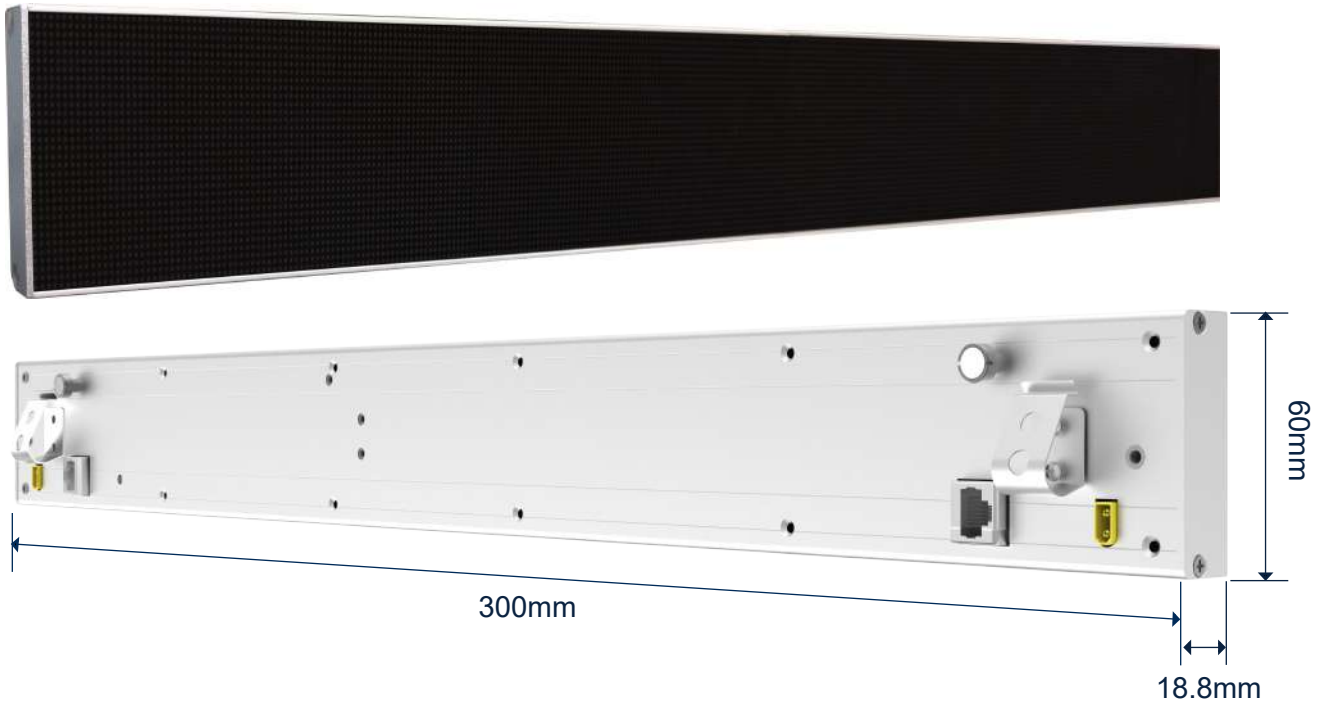


Model		
Dimension	Unit Size	mm 300x60 / 600x60
Weight	Unit Weight	400 / 800 g
Screen	Pixel Pitch	1.875 mm
	Pixel Configuration	COB 3in1
	Pixel Density	284089 dots/m ²
	Scan Mode	1/32
	Brightness Adjustment	256 level
	Viewing Angle	120°/120°
	Grey Scale	16 bit
	Brightness	800-1200nit
	Refresh Rate	≥ 1500 Hz
	Contrast Ratio	3000:1
Body	Chassis Material	Alluminium
	Packing	By carton with foam inside
Strengthness	Shockproof	
	Dustproof	
	Waterproof	
System	Control System	Synchronous
Power	Ave. Power consumption	12W/set (300mmx60mm)
	Input Voltage	AC 90V - 240V

Module Connection



Installation and Removal

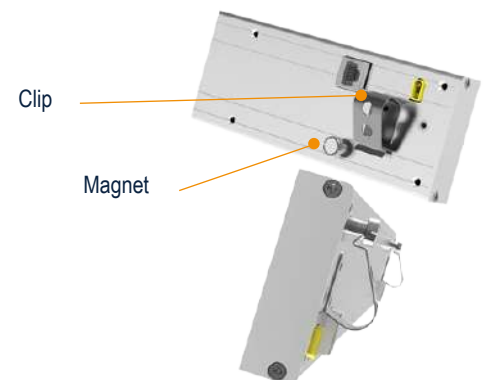

the characteristics can change without notice

Intertouch s.r.l.

Via di Pietralata 157 - 00158 Rome (Italy) - www.intertouch.it - info@intertouch.it - ph +39 06 64220488