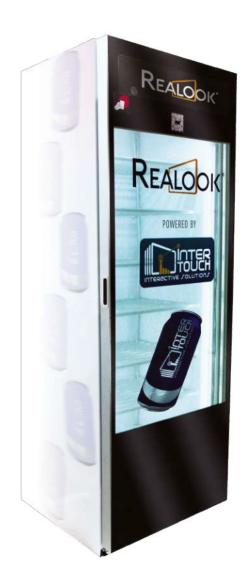# REALOOK®

REALOOK® GLASS DOOR
The first transparent display door All-In-One

The exclusive and interactive Realook® Glass Door replaces the ordinary fridge door with a transparent digital LCD. This see-through monitor gives a complete view of the products while full HD dynamic content are running. The Realook® Glass Door has interactive solutions for the engagement of the customer, in order to offer a multisensory experience.

- Touch screen interactive engagement
- The fridge just like an in-store touch point
- For new fridge production and retrofit use
- All-In-One Plug & Play solution
- Remote Content Management
- Proximity Marketing
- Full glass look

Options

Proximity sensor
RFID-NFC Antenna
Audience Measurement System
Web Cam
Beacon

We're helping brands to embrance the innovation with our Realook® Technology

Realook® is a trademark of Intertouch s.r.l.

PRODUCT SPECIFICATION

Integrated NFC reader

Integrated Win or Android PC

Beacon

Web Cam

Realook® transparent monitor

Capacitive Multitouch

Proximity Sensor

- Self closing system
- Magnetic gasket
- Full glass look

Multimedia Technology

Monitor	Panel Size	TFT LCD Transparent Display
	Size	47"
	Resolution	FHD 1920 x 1080
	Active Area	586.4 x 1041.6 mm
	Contrast Ratio	1000:1
	Viewing Angle	178° (H)/ 178° (V)
Computer Windows	CPU	Intel Core i5 1.90 Ghz
	Color	Black, White, Silver or customized colors
	Graphic Card	Asus Hd5450 1Gb
	SSD	SSD 60 Gb
	O.S.	Windows Embedded 7 64 bit
Computer Android	CPU/Memory	Rockchip 3368 Octa Core 64 bit Cortex-A53 fino a 1.5GHZ
	O.S.	Android 5.1 (can be upgraded)
	Connection to Network	RJ45, WIFI, 3G (optional)
	Power	AC100-240V 50/60 Hz
Touch Foil	Technology	Projected capacitive
	Touch points	10 point multitouch
	Thickness	0.365 mm
	Sensing Type	Mutual Capacitance 2 layer
	Response Time	16ms (TSB)
Options	Proximity sensor	
	RFID-NFC Antenna	
	Audience Measurement System	
	Web Cam	
	Beacon	

Freezer

Exsercise temp.	-25°
Environmental temp.	+25°
Environmental RH	60%

Cooler

Exsercise temp.	0/2°
Environmental temp.	+25°
Environmental RH	60%

* Le caratteristiche indicate nei cataloghi si intendono del tutto indicative e possono variare senza preavviso